


OUMAN LCD

External display for Ouman controllers. Compatible with the following products:

Ouflex A XL, Ouflex AX and Ouflex M BA

Ouman S105, Ouman S203 and Ouman C203

Wall mounting frame is available for purchase separately.

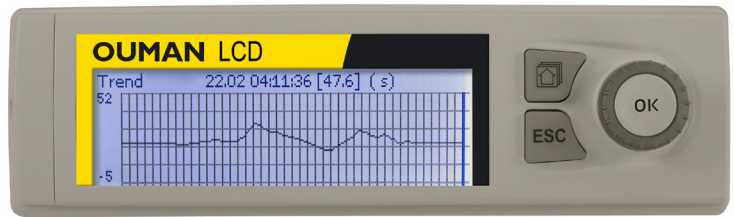

TECHNICAL SPECIFICATIONS

Product code	OMA0658
Dimensions	width 157 x height 45mm x depth 33 mm
Protection class	IP43
Operating voltage	Operating voltage come from the main controller via cable. Connecting to the MB A requires a special cable RJ12 <> RJ45 (purchase separately from Ouman). All other models use standard straight Ethernet cable.
Maximum distance between display and controller is 20 meters.	
Directives	
EMC Directive	2014/30/EU and the amending CE Directive 93/68/EEC
Low Voltage Directive	2014/35/EU and the amending CE Directive 93/68/EEC
RoHS Directive	2011/65/EU and 2015/863/EU
WEEE Directive	2012/19/EU
Standards	
EMC Emission	EN 61000-6-3:2020 (EN55022B)
EMC Immunity	EN 61000-6-1:2016 (IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-11)
Safety	EN 60730-1:2011