



The water sensors (TMW) installed on the water pipes are suitable for heating and domestic hot water control. The water sensors come with immersion sensor of different lengths as follows (Ø 4 mm):


Type code	Meas. element	Meas. accuracy
TMW-(50, 100, 210) / NTC10	NTC 10	± 0,2 °C (0-70 °C)
TMW-(50, 100, 210) / Pt1000	Pt 1000	± 1 °C (0-70 °C)
TMW-(50, 100, 210) / Ni1000	Ni 1000 LG	± 1 °C (0-70 °C)

Technical information

Materials

- Case	Cover PC, base PBT, seal PA
- Immersion pipe and nipple	RST AISI 304 EN 1.4301
Range of use	-50 °C...+130 °C (water, cooling liquids)
Protection class	IP 54
Seal	M16 x 1,5
Pressure class	PN 16
Time constant	< 3 s
Thread	R 1/2", cross-knurling
Wrench size	22 mm

Dimensions:

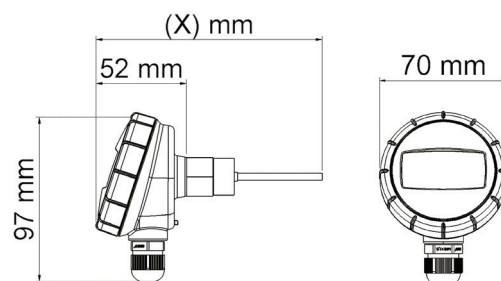


X = 130 mm, 180 mm, 290 mm

Installation and connection

Install the water sensor on the bend of the water-supply pipe so that the immersion sensor faces opposite the direction of flow.



The sensor should be positioned at a point where the water is well mixed. With heating control install the supply water sensor approx. 1 m from the mixing point and with hot water temperature control install the supply water sensor less than 0,5 m from the mixing point

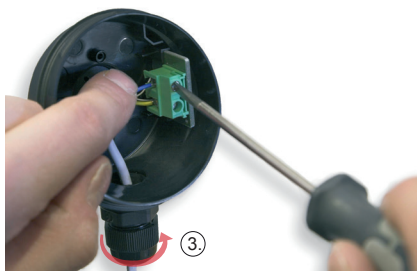

1. Screw the sensor on a welded pipe fitting or T-piece using proper sealing methods. The case can be turned clockwise at the end of the rst pocket until the cable's bushing seal goes down.
2. Open the screw-off lid and connect the sensor to the controlling device as a two-wire connection using weak current cable. The polarity of the cable is irrelevant.
3. Tighten the bushing seal so that it acts as a seal and repels water.

NTC10

Tol. $\pm 0,2$ °C (0-70 °C)

Temperature/Resistance

°C	Ω
-50	672 600
-40	337 270
-30	177 210
-25	130 540
-20	97 140
-15	72 990
-10	55 350
-5	42 340
0	32 660
5	25 400
10	19 900
15	15 710
20	12 490
25	10 000
30	8 055
35	6 531
40	5 325
45	4 368
50	3 602
55	2 987
60	2 488
65	2 084
70	1 753
75	1 482
80	1 257
85	1 072
90	917,4
95	788,2
100	679,8
110	511,0
120	389,4
130	300,5
140	234,7

Ni 1000 LG

Tol. $\pm 0,4$ °C (0 °C)
DIN EN43760
tcr 5000 ppm / K

Temperature/Resistance

°C	Ω
-50	790,9
-40	830,8
-30	871,7
-25	892,5
-20	913,5
-15	934,7
-10	956,2
-5	978,0
0	1000,0
5	1022,3
10	1044,8
15	1067,6
20	1090,7
25	1114,0
30	1137,6
35	1161,5
40	1185,7
45	1210,2
50	1235,0
55	1260,1
60	1285,4
65	1311,1
70	1337,1
75	1363,5
80	1390,1
85	1417,1
90	1444,4
95	1472,0
100	1500,0
110	1557,0
120	1615,4
130	1675,2
140	1736,5

Pt 1000

Tol. $\pm 0,3$ °C (0 °C)
DIN EN60751 B
tcr 3850 ppm / K

Temperature/Resistance

°C	Ω
-50	803,1
-40	842,7
-30	882,2
-25	901,9
-20	921,6
-15	941,2
-10	960,9
-5	980,4
0	1000,0
5	1019,5
10	1039,0
15	1058,5
20	1077,9
25	1097,3
30	1116,7
35	1136,1
40	1155,4
45	1174,7
50	1194,0
55	1213,2
60	1232,4
65	1251,6
70	1270,8
75	1289,9
80	1309,0
85	1328,0
90	1347,1
95	1366,1
100	1385,1
110	1422,9
120	1460,7
130	1498,3
140	1535,8

